ARON LIGHT

TECHNICAL INFORMATIONS

LEV
15W 4000K BRANCO



Downlight saliente de design minimalista, proteção (IP54) aliada ao elevado PF (>0.9) e Baixo THD (<20%) fazem da linha Lev um preferido para qualquer projetista.
Surface downlight with minimalist design, the high protection (IP54) combined with the high PF (>0.9) and Low THD (<20%) make the Lev series a favorite for any designer.
Downlight saliente con diseño minimalista, el alto nivel de protección (IP54) combinado con el alto PF (>0.9) y bajo THD (<20%) hacen de la línea Lev un favorito para cualquier proyectista.

ILAR-00696

REFERENCE	
Reference	ILAR-00696
Led Type	CITIZEN COB
Mounting Type	Surface mounted
Body Material	Aluminum
Housing Colour	White RAL9016
Body Shape	Round
Nominal Lifetime (EOL end of life)	50.000H
Dimmable	NO

DIMENSION & WEIGHT	
Lenght	Ø90mm
Width	-
Height	100mm
Weight	0.52
Cutout	-
Packaging Unit	24pcs/carton
Gross Weight	14.5kg
Volume	50x38x29cm


PHOTOMETRICAL DATA	
Total Luminous Flux	1500
Luminous Efficacy	100lm/w
Beam Angle	60°
Colour Temperature	4000K
Colour Rendering Index	>80
Colour Consistency	<=6
UGR	-

ELECTRICAL AND OPERATING DATA	
Nominal Wattage	15W
Nominal Voltage	200-240V
Operating Frequency	50Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.0001s
ON/OFF Cycles	100.000


ENERGY LABEL & STANDARDS	
Energy Label	-
Energy Consumption KWH/1000H	-
Type of Protection	IP54
Protection Class	I
Protecion Class IK (shock resistence)	-

CERTIFICATIONS	
2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
ENEC	-
Warranty	3 YEARS

SIZE

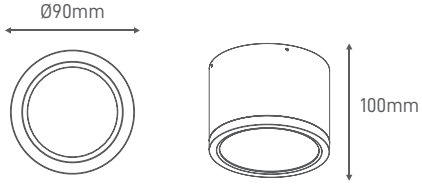

BEAM ANGLE



Designed by Aronlight in Portugal Made in PRC

Aronlight | Estrada Outurela 131A
Telefone: +351 215 846 905 - 2790-118 Carnaxide, Portugal
www.aronlight.com
geral@aronlight.pt